





## SOIL IMPROVEMENT PRODUCT CATALOGUE.





## **ONE STEP AHEAD... IMPROVING MORE THAN JUST PROFITS.**


**ABOUT OUR COMPANY** 

**ALLU PRESSURE FEEDER** 

**PF7+7MOBILE FEEDER** 

**ACCESSORIES AND OPTIONS** 



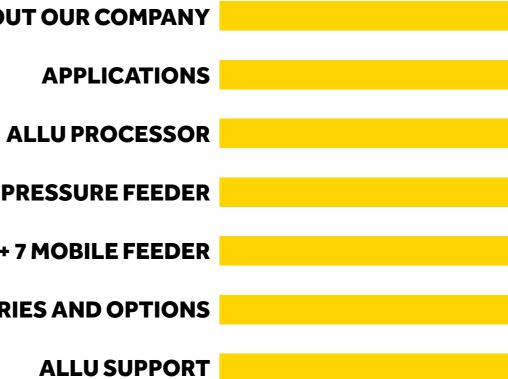

4

# **ABOUT OUR** COMPANY.





**OVER** 



ALLU designs, manufactures and sells products for adding value to customers in numerous applications for processing different kinds of materials. Typical applications include e.g. soil and waste material recycling, processing contaminated soil, transforming waste to usable material. The history of ALLU goes back for over 30 years and today over 95% of the business is done with international customers globally. Driven by customer needs, ALLU has innovated the methods and equipment for improving the processes and operations of the customers. The serving network of ALLU consist today of own subsidiaries and a dealer network in more than 30 countries.



### **ALLU AROUND THE WORLD**



#### HEADQUARTERS

**ALLU Finland Oy** Jokimäentie 1 16320 Pennala, FINLAND Tel: +358 3 882 140 Fax: +358 3 882 1 440 Email: info@allu.net

### **NORTH AMERICA**

ALLU Group Inc 25 Kimberly Road, Suite A, East Brunswick, NJ 08816 USA Toll Free: 800-939-ALLU (2558) Tel: +1 (201) 288-2236 Fax: +1 (201) 288-4479 Email: usa@allu.net

ALLU Sverige AB Stenvretsgatan 1, SE-749 40 Enköping, SWEDEN Tel: +46 (0)171-17 15 17 Email: sverige@allu.net

GERMANY

Maschweg 77

GERMANY

DE-49324 Melle

ALLU Deutschland GmbH

Tel: +49 (0) 5422 / 92782 - 0 (Zentrale)

Fax: +49 (0) 5422 / 92782 - 15

Email: deutschland@allu.net

### **ALLU SALES OFFICE MIDDLE EAST**

Tel: +968 9885 3091 (Oman) | +614 3499 0368 (Australia) Email: me@allu.net

### FRANCE

ALLU France S.A.R.L. 180 ZA les Bruottées 21200 VIGNOLES, FRANCE Tel: +33 3 80 24 04 34 Fax: +33 3 80 24 04 36 Email: france@allu.net

### **ALLU SALES OFFICE CHINA**

Room 607, No. 729 Tongbei Road, Yangpu District, 200120 Shanghai, P.R. CHINA Tel: +86 21 5888 5836 Fax: +86 21 5888 5801 Email: china@allu.net

# **APPLICATIONS.**

ALLU Soil Improvement is versatile, efficient and cost-efficient material mixing and soil stabilization technology. It's equipment you'll wish you'd found sooner.



CIVIL Engineering



### CONTAMINATED SITES REMEDIATION



COASTAL FACILITIES



## FOUNDATION

Bearing capacity improvement of poor-quality soils by mixing, adding binder and stabilizing.

- 1. Residential areas
- 2. Dredging and harbour construction
- 3. Railway and road construction

## REMEDIATION

Purifying or neutralization process by mixing and adding binder or additives to contaminated soil or waste material.

- 1. Liquid waste lagoons
- 2. Oil spill and acid tar
- 3. Contaminated soil

## **SOLIDIFICATION**

Transforming very soft soil or liquid material into solid form by mixing and adding binder.

- 1. Temporary roads
- 2. Mine tailings
- 3. Excavation work

















# **ALLU PROCESSOR.**

The ALLU Processor is a power mixer hydraulic attachment for excavators. This attachment converts the excavator into a powerful and versatile mixing tool, capable of penetrating and mixing a variety of difficult materials - everything from clay, silt, peat and dredged sediments to hazardous liquid waste and contaminated soil.

The ALLU Processor mixer is linkable to any type of binder feed - wet or dry.


## **ALLU PROCESSOR 300HD**

	TECHNICAL SPE
Working depth	
Hydraulics	
Torque	
Weight	
Base machine	

### **ALLU PROCESSOR 500HD**

	TECHNICAL SP
Working depth	
Hydraulics	
Torque	
Weight	
Base machine	

### **ALLU PROCESSOR TRANSMISSION**



HIGH SPEED HYDRAULIC MOTOR

- Displacement 80 cm<sup>3</sup>
- 3125 rpm @ 250 L/min ■ 3750 rpm @ 300 l/min

### **SPECIAL FEATURES**

Patented V shaped mixing head

- Minimal "blind spot" between the auger shaped mixing drums
- Increases soil penetration capability
- Increases mixing capability
- Changeable wear parts



## **IT REACHES.** IT MIXES. **IT PROCESSES DRY OR WET.**



#### **ECIFICATIONS**

3 m / 10 ft

- Max. pressure: 350 bar (5000 psi) Max. flow: 300 l/min (79 gallon US/min)
- Max. power: 160 kW
- Max: 12 000 Nm / drum at 350 bar
- 2 400 kg (5 300 lbs.)
- 25 45 ton (55 000 99 000 lbs.)

#### **ECIFICATIONS**

5 m / 16 ft

- Max. pressure: 350 bar (5000 psi)
- Max. flow: 300 l/min (79 gallon US/min)
- Max. power: 160 kW
- Max: 12 000 Nm / drum at 350 bar
- 2 800 kg (6 000 lbs.)
- 25 45 ton (55 000 99 000 lbs.)

- PLANETARY GEAR
- Gear ratio 1:31.8
- Nominal torque 18 000 Nm / drum
- Maximum torque 25 000 Nm / drum (theoretical)
- MIXING DRUM SPEED: MIN 25 RPM MAX 100 RPM

# **ALLU PRESSURE FEEDER.**

ALLU



### ENGINE - Stage V / Tier4F

Power
Torque
Fuel tank

### COMPRESSOR

Туре	Screw compressor
Max. pressure	10 bar (145 psi)
Min. pressure	3 bar (43.5 psi)
Power	75 kW
Output with working pressure	11,7 m³ (15,30 yd³ / min)

## **IT FEEDS. IT CONTROLS. IT REPORTS** WITH PRECISION.

The mobile ALLU Pressure Feeders are high capacity, tracked, intelligent feeding units for dry binders. The computer-controlled binder feed prevents any unnecessary amount of binder to be feed. This unique feature brings big cost savings and efficiency to any jobsite.

## **PF7+7 DOUBLE TANK UNIT**

ALL

ur,

0

TECHNICAL SPECIFICATIONS		
Weight (1. empty - 2. full)	1.) 22 000 kg (48 500 lbs.) 2.) 38 500 kg (84 878 lbs.)	
Tank volume	2 x 7 m <sup>3</sup> (2 x 9,15 yd <sup>3</sup> )	
Max. operational pressure	10 bar (145 psi)	
Ground pressure (1. full 800 mm track shoe - full 500 mm track shoe )	1.) 0,68 kg / cm2 2.) 1,02 kg / cm2	
Adjustable. binder feed capacity	3 - 15 kg / sec. ( 6,6 - 33 lbs.)	
Binder granulate specification	0 - 2 mm (0 - 0,78 inch)	
Max. feed distance (1. 3-inch hose - 2. 2-inch hose)	1.) 200 m (218 yd.) 2.) 100 m (109 yd.	
Feed control & reporting system	ALLU DAC.2.1	
Hydraulics	Hydraulically operated compressor, rotary valve and process valves	
Dimensions L x W x H	6870 x 3400 x 3300 mm (22,53 x 11,15 x 10,82 ft.)	

110 kW / 2 200 rpm

560 Nm / 1 400 rpm

400 I (105.6 gallons US)

# **PF7+7 MOBILE FEEDER FOR DEEP DRY MIXING**

## LIME / **CEMENT COLUMNS.**

The Allu PF 7+7 is a self contained mobile feeder for deep dry mixing, the track driven feeder is completely road legal and easy to transport on a low bed trailer making it extremely mobile. Fast setup on jobsite results in less down-time and the large air capacity gives improved productivity.

### **SPECIAL FEATURES**

- Remote controlled for safe and easy loading and unloading
- Maximum column depth 30 m (98 ft.)
- Long feed distance (max 200 m (656 ft.)) Adjustable feed rate
- Can bus control system
- Easy feed data access and transfer to outside control system


# **ACCESSORIES AND OPTIONS.**

The maximum mixing depth can be increased by adding an extension to the Processor attachment. The available extensions are easily installed or removed by "plug and play".

### **PROCESSOR EXTENSIONS**

2 m EXTENSION		
Weight	770 kg (1 700 lbs.)	
Length	2m (7 ft.)	
Max. mixing depth 300HD + extension	5 m (16 ft.)	
Max. mixing depth 500 HD + extension	7m (22 ft.)	


3 m EXTENSION		
Weight	950 kg (2 100 lbs.)	
Length	3m (9 ft.)	
Max. mixing depth 300HD + extension	6 m (19 ft.)	
Max. mixing depth 500 HD + extension	8m (26 ft.)	

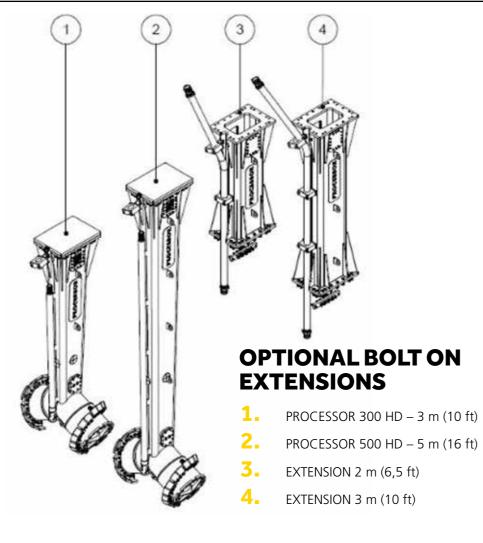






The ALLU Soil Improvement products doesn't just come with inbuilt efficiency. They also comes with unrivalled aftersales support. No matter what the issue, our team is on hand to offer all the help you need in getting the most out of your equipment. We're just a phone call or email away.

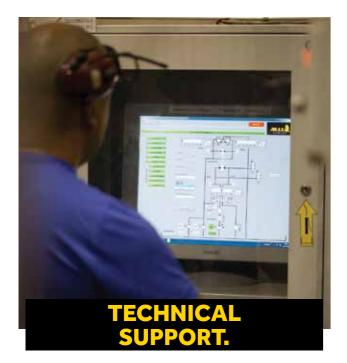

Having built the unique Soil Improvement technology, there's no one better than our technical experts to offer their support. From getting started for the first time, to pushing your soil improvement products to their limits, we can freely advise. It's very unlikely that anything will go wrong with your equipment, but it's good to know we're here all the same.



By providing training and sharing our information we can help to improve the skills of your workforce and advance the industry as a whole. Overseen by our highly-experienced team, we help you to achieve maximum levels of efficiency through technical improvement, new technology and enhanced operating practices.

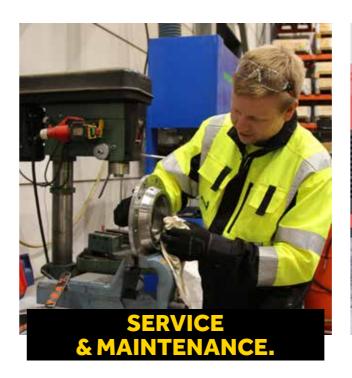

To complement our unique soil improvement equipment, we offer a wide selection of service and maintenance procedures. Whether it's inspection or troubleshooting, the ALLU team is always happy to lend their support. And with planned preventative maintenance, customers can get all the advice needed to keep their machines fully optimised and working at maximum capacity.





Why replace your equipment when you refurbish or repair it. No equipment is faultless, but sometimes it's only a small part that needs attention. A little finetuning here. The odd upgrade there. And that's where we'll help. At ALLU, we're all for saving our customers money. Your business is our business – and we're determined to see you right.

# **OUR GLOBAL TEAM IS HERE TO HELP YOU ACHIEVE YOUR SOIL IMPROVEMENT GOALS.**

Soil Improvement Product Catalogue | ALLU **19** 

"THE A

ATTA PROCESSOR.

### ALLU.NET



ALLU GROUP Jokimäentie 1, 16320 Pennala, FINLAND Tel: +358 3 882 140 info@allu.net

